

## 1800 mm Refrigerated Food Display

**Series:** ActiveView

**SKOPE ID:** F18Roo

**Dimensions:** 1800 mm (W) x 750 mm (D) x 1300 mm (H)

**Capacity:** 732 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_



A premium 1800 mm wide refrigerated food display merchandiser designed for hospitality spaces requiring high-impact presentation and temperature control, such as cafés, petrol and convenience, and retail. The fridge is engineered and certified to safely store food from 1°C to 4°C. Temperatures are also adjustable via the SKOPE-connect smartphone app, including a dedicated setting for controlled ambient (15°C to 18°C). The frameless double-glazed glass display is heated to minimise condensation and maximise product visibility. The fridge is supplied with glass shelves on low-profile stainless steel arms as standard, with stainless steel wire shelves as an optional accessory. The shelving is height-adjustable and can be tilted with upstands and ticket holders on the front edge. Each shelf is fitted with LED light strips to highlight the food on display while additional full-height lighting ensures optimum visibility. All lighting can also be dimmed and set to automatically turn on or off to save energy. Access to the fridge is via two fully removable double-glazed sliding doors that stay open over 75 mm, and auto-soft-close at 75 mm and less. At 1300 mm height on castors, the cabinet has a convenient serve-over height. The removable side and front base panels support seamless integration into shopfitting designs. Constructed with an energy-efficient, rear breathing R290 removable refrigeration cartridge, allowing the unit to be fully enclosed on the front and sides, the fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



ActiveCore Technology



Natural Refrigerant



GEMS



SKOPE-connect



© 2025 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

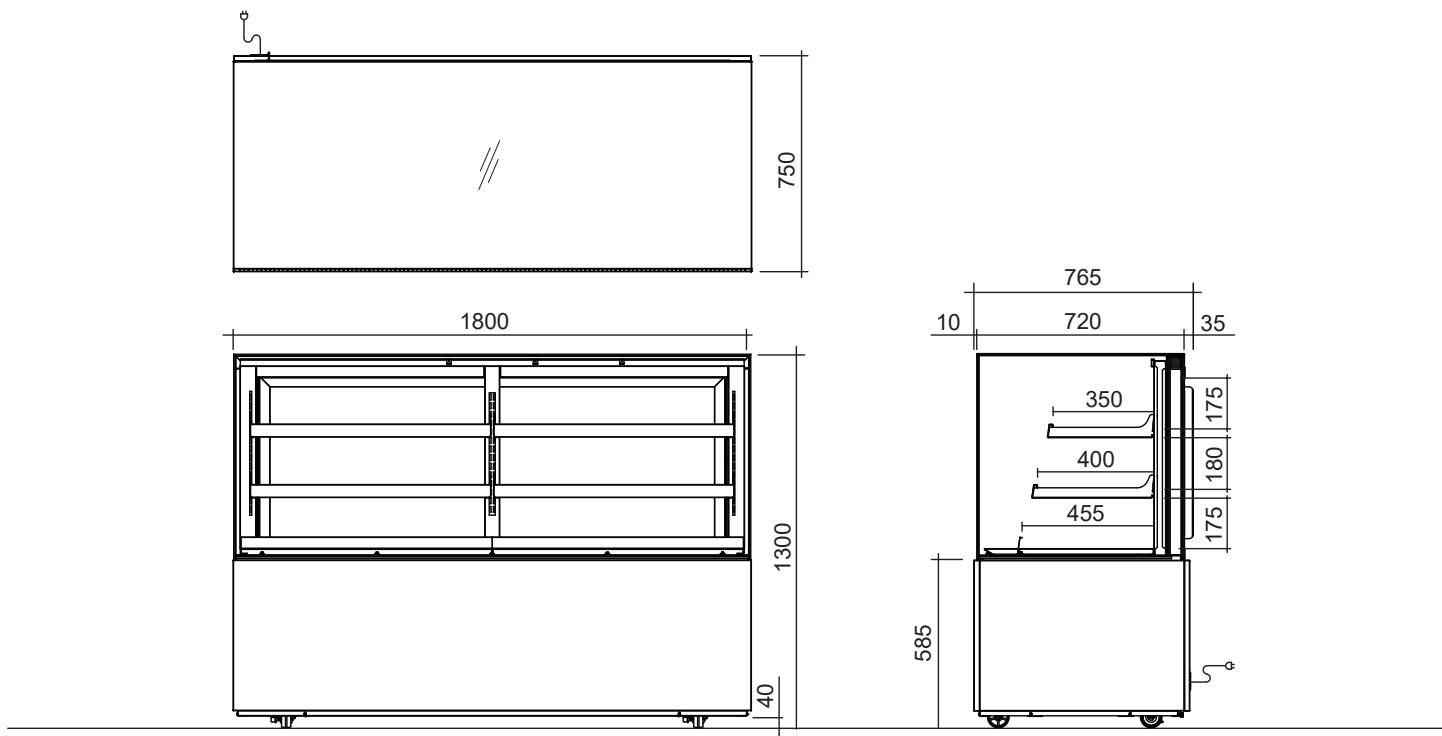
Email: [skope@skope.com](mailto:skope@skope.com)

AUS Freephone: 1800 121 535

NZ Freephone: 0800 947 5673

PSS1233 | Rev. 1.1 | Jan. 2026

[skope.com](http://skope.com)

**Cabinet**

Type	Refrigerated
Finish	304 AISI stainless steel and black, screen-printed glass
<b>Insulation</b>	Type PU foam Thickness (mm) 40 Blowing Agent Cyclo-iso pentane (C5H10/C5H12)
<b>Doors</b>	Type Glass sliding door (double-glazed, argon-filled, low-e, internal side mirrored) Opening Size Height (mm) 590 Width (mm) 780
<b>Shelving</b>	2 x adjustable height half width top shelf (830W x 350D), 2 x adjustable height half width middle shelf (830W x 400D), 1 x solid bottom shelf (1760W x 450D)
<b>Lighting*</b>	Interior 1 x 1600 mm 22.7 W top light, and 2 x 580 mm 8.2 W side lights Shelving 4 x 700 mm 9.9 W undershelf lights

**Dimensions<sup>†</sup>**

	External	Internal	Packed
Width (mm)	1800	1760	1860
Depth (mm)	750	635	790
	1300 (castors)		
Height (mm)	1295 to 1380 (legs) 1260 (plinth mount)	655	1600
Weight (kg)	280		340
ANSI Volume (L)	732		
Footprint (m <sup>2</sup> )	1.35		

**Performance**

Product Temperature Range (°C)*	1 to 4
Maximum Ambient Temperature (°C)	40
Sound Power Level (dB(A))	62.7

**Greenhouse and Energy Minimum Standards (GEMS)**

Star Rating	8
Product Temperature Class	M1
Total Energy Consumption	5.80 kWh/24 h
Annual Running Costs	\$635 (@ \$0.30/kWh)

**Electrical**

Supply	220 to 240 volts a.c., 50 Hz, single phase supply
Cord	2.5 m power cord with 3-pin, 10 amp plug
Current draw (A)	7.0

**Refrigeration**

Controller	SCS Connect (SKOPE-connect compatible)
System Type	Removable cartridge
Cartridge Weight (kg)	28
Refrigerant/Charge	R290/99 g
Nominal Capacity (W)	680
Heat Rejection (W)	Average 240 Peak 310
Defrost Type	Automatic, off-cycle
Drainage	No plumbing required

\* Controllable via SCS Connect.

**Ventilation (mm)**

Top	Not required	Sides	Not required	Rear	500
-----	--------------	-------	--------------	------	-----

**Dimensional Tolerances**

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets
		At each joint
Less than 1 metre	±5 mm	±5 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm
		+15 mm

FDR.1800  
on the SKOPE website