

Features

Linde tiller arm control

- Wide tiller handle profile for gloved hands
- Rugged hand guard
- Up to 100° steering angle to either side
- Sprung loaded tiller for easy parking
- Simple lever operation for lift/lower

Efficient pallet handling

- Lead-in rollers for easy entry into closed base pallets
- Tapered fork tips for easy entry through shrink-wrapping
- A clear view to the fork tips
- The low rolling resistance reduces physical demands on the operator

Low maintenance

- Torsion-resistant chassis design
- Solid push rods
- Sealed hydraulic unit
- 12 month's warranty

Economical service support

- Fixed price servicing
- Full maintenance contracts
- Breakdown service cover
- Rapid collect and repair package



Standard and optional equipment

Standard



- Nylon steer and load wheels
- Powder coated paint finish
- Three-position control lever

Options M 20/M 25

- Rubber or polyurethane steer wheels
- Polyurethane load wheels
- Tandem load wheels

Options M 25 only

- Stillage frames
- Braking system
- Heavy lift
- Galvanised or stainless steel
- Low profile (53 mm lowered height)
- Paper reel/drum carrier
- Manual or electric scissor lift
- Weigh scales

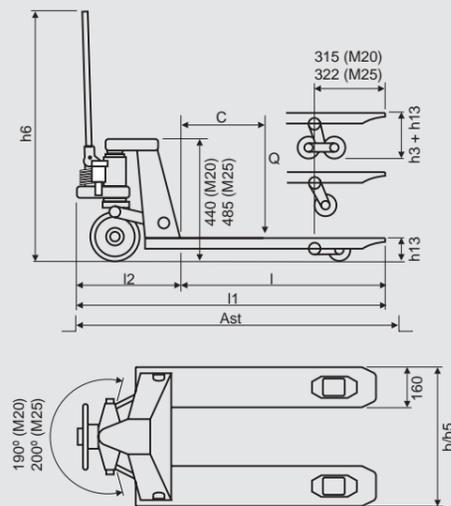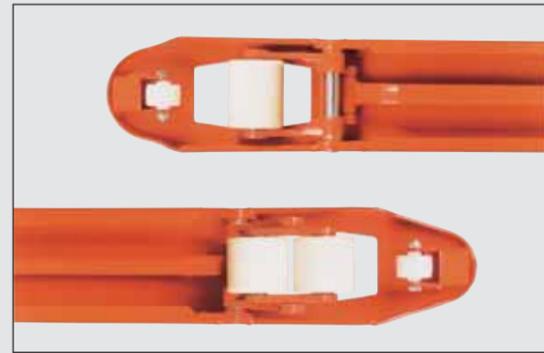

The manufacturer reserves the right to alter specifications without notice. Illustrations and technical details non-binding for actual construction. All measurements subject to customary tolerances.

Printed in United Kingdom. DM5221/3/06



Hand Pallet Trucks Capacity 2000 kg & 2500 kg M 20, M 25

SERIES 4 (M 20)
SERIES 2 (M 25)

Technical data	M 20	M 25	
Load capacity	Q (kg)	2000	2500
Load centre	c (mm)	500, 600	500, 600
Lift	h3 (mm)	115	115
Lowered height	h13 (mm)	85	85
Overall height	h6 (mm)	1225	1235
Fork length	l (mm)	1000, 1150, 1220	1000, 1150, 1220
Overall length	l1 (mm)	1330, 1480, 1550	1375, 1525, 1595
Length to fork face	l2 (mm)	330	375
Overall width	b (mm)	550, 685	550, 685
Fork spread	b5 (mm)	550, 685	550, 685
Working aisle width	Ast (mm)	1530, 1680, 1750	1575, 1725, 1795
Steer wheel	mm	ø 175 x 50	ø 200 x 50
Load wheels, single	mm	ø 80 x 93	ø 80 x 93
Load wheels, tandem	mm	ø 80 x 70	ø 80 x 70
Truck weight	kg	64 to 85	68 to 90



Introduction

The versatile Linde hand pallet truck range is designed for economical and efficient palletised load handling in a wide variety of applications such as lorry loading/unloading and internal load transfer. Its rugged construction and simple controls provide a durable, easy to use manual handling solution and can be found in virtually every type of industry working in conjunction with powered mobile equipment.

Performance

With its fast lift feature, up to 100° tiller arm sweep to either side and lead-in rollers, the Linde hand pallet truck makes light work of palletised load handling. The tiller arm is sprung loaded to the vertical position. The hydraulic pump unit is protected and sealed from the environment for consistent reliability. Load and steer wheel tyre options ensure the truck can be matched to individual applications.

Linde Material Handling

Linde

Ease of use

The low pivoting tiller arm is designed to place the operator at a comfortable and safe distance from the truck when walking or manoeuvring and has a simple lever control. The operator's hands are protected by a robust hand guard.

Durability and safety

The torsion resistant construction of the chassis and durable powder coat finish ensure that these trucks provide a safe reliable performance, day-in, day-out.

Applications large and small

Whether the application is large or small, the ubiquitous hand pallet truck is an ever-present link in the supply chain, carrying out a host of tasks too numerous to list and plays its part in enhancing the efficient movement of goods.