

KW-PB110A-LED

2MP Color Hunter HD Fixed Mini Bullet Analog Camera

 **COLORHUNTER**
ภาพสีตลอด 24 ชม.



รายละเอียด

อิมเมจเซ็นเซอร์ขนาด 1/3" CMOS

ความละเอียด 2 ล้านพิกเซล

อัตราเฟรมเรทสูงสุดที่ 30fps @ 1080P

รองรับ 4 ระบบ HDTVI / HDCVI / AHD / CVBS

OSD Menu, DWDR , BLC, HLC, 2D/3D DNR

Color Hunter ภาพสีกลางคืนสูงสุด 20 เมตร

ขนาดเลนส์ 2.8 มม, มุมมอง 100.9 องศา


ระบบป้องกันไฟกระชาก 4KV

ค่ากันน้ำ IP67 / DC12V

Specifications

Model	KW-PB110A-LED	
Sensor		
Pixel	2MP	
Size	1/3"	
Minimum illumination	0.02 lux (F1.6, AGC ON) 0.00 lux (white light on)	
Lens		
Lens	2.8mm	4.0mm
Lens mount	M12	
Angle of view	H: 100.9° V: 56.5° D: 121.8°	H: 82.5° V: 42.1° D: 98.6°
Illuminator		
Illuminator	One white-light illuminator	
Illumination distance	20m	
Lifetime	≥60,000 hours	
Video		
Resolution	1080P: 1920(H)×1080(V) 720P: 1280(H) ×720(V)	
Frame rate	TVI/AHD/CVI: 1080P@30fps, 1080P@25fps; 720P@30fps, 720P@25fps CVBS: PAL, NTSC	
Shutter time	PAL: 1/25s-1/50000s NTSC: 1/30s–1/50000s	
Image		
Exposure mode	4 modes: Global (default), BLC, HLC, DWDR	
Day/Night	24/7 full-color imaging	
Digital noise reduction	2D/3D	
White balance	Two modes: Auto (default), Manual	
WDR	DWDR	
Flip	Supports 180° horizontal flip, 180° vertical flip	
Interface		
Power	5.5mm power interface	
Video output	BNC, supports TVI/AHD/CVI/CVBS	
Operating environment		
Temperature	-30°C to 60°C(-22°F to 140°F)	
Humidity	≤95% (RH, non-condensing)	
Surge protection	4KV	
Ingress protection	IP67	
General		
Power	DC 12V(±25%), with reverse polarity protection and surge protection, Max 2.4W	
Mount	3D bracket supplied, surface mount (default), optional backbox, pole mount bracket	
Dimensions	142mm*63mm*65mm (L*W*H)	
Material	Plastic	
Weight	145g(0.32lb)	

Dimensions

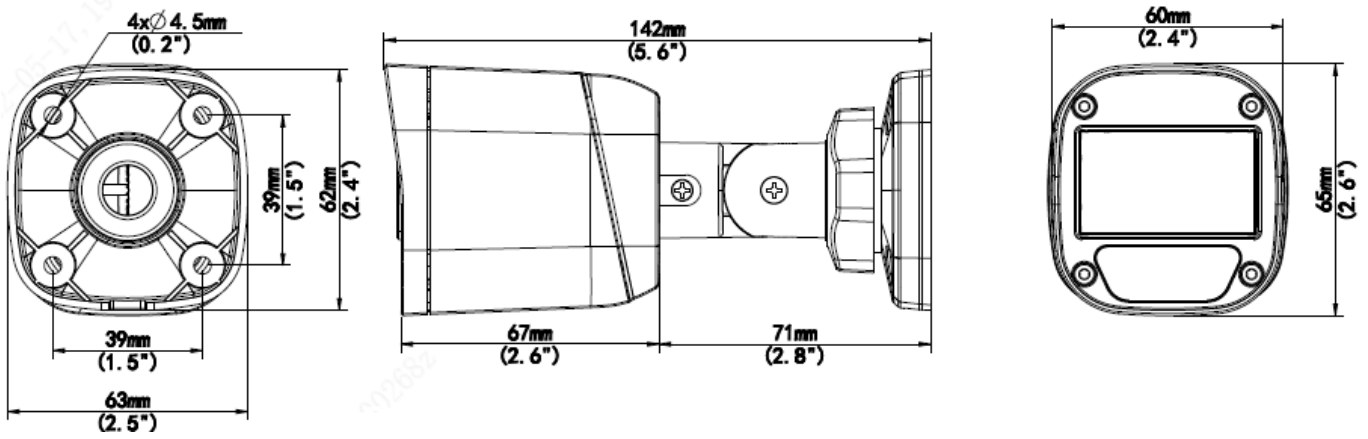

KW-PB110A-LED