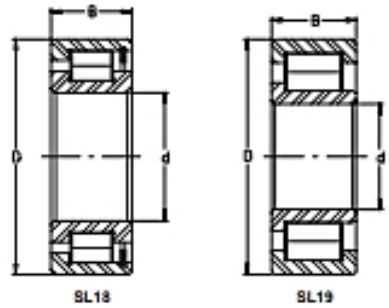
# Cylindrical Roller Bearings

## SL18 18, SL18 22, SL18 29, SL18 30 & SL19 SERIES

- Metric series
- Single row
- Semi-locating
- SL18 – Double Flanged Inner Rings
- SL19 – Double Flanged Outer Rings



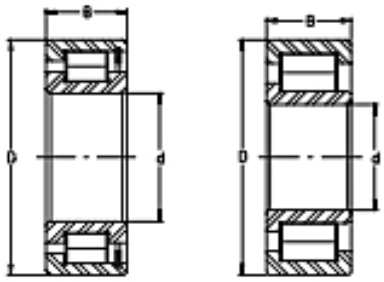

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)623-6572.

| PART NUMBER | SHAFT d | SHAFT d | OUTER RING OD D | OUTER RING OD D | BEARING WIDTH B | BEARING WIDTH B | WEIGHT PER PIECE | WEIGHT PER PIECE | DYN. CAP. C | DYN. CAP C | STAT. CAP. $C_0$ | STAT. CAP. $C_0$ | SPEED LIMIT OIL |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | inch | mm | inch | mm | inch | mm | lbs | kg | lbf | kN | lbf | kN | rpm |
| SL18 3004 | 0.787 | 20 | 1.654 | 42 | 0.630 | 16 | 0.243 | 0.11 | 6,200 | 27.5 | 6,000 | 26.5 | 10000 |
| SL18 2204 | 0.787 | 20 | 1.850 | 47 | 0.709 | 18 | 0.353 | 0.16 | 9,200 | 41 | 8,400 | 37.5 | 9500 |
| SL18 3005 | 0.984 | 25 | 1.850 | 47 | 0.630 | 16 | 0.265 | 0.12 | 7,100 | 31.5 | 7,300 | 32.5 | 9000 |
| SL18 2205 | 0.984 | 25 | 2.047 | 52 | 0.709 | 18 | 0.397 | 0.18 | 10,300 | 46 | 10,100 | 45 | 8500 |
| SL19 2305 | 0.984 | 25 | 2.441 | 62 | 0.945 | 24 | 0.816 | 0.37 | 14,200 | 63 | 12,800 | 57 | 7500 |
| SL18 3006 | 1.181 | 30 | 2.165 | 55 | 0.748 | 19 | 0.441 | 0.2 | 9,100 | 40.5 | 9,700 | 43 | 7500 |
| SL18 2206 | 1.181 | 30 | 2.441 | 62 | 0.787 | 20 | 0.662 | 0.3 | 13,700 | 61 | 14,200 | 63 | 7000 |
| SL19 2306 | 1.181 | 30 | 2.835 | 72 | 1.063 | 27 | 1.235 | 0.56 | 19,600 | 87 | 19,100 | 85 | 6500 |
| SL18 3007 | 1.378 | 35 | 2.441 | 62 | 0.787 | 20 | 0.573 | 0.26 | 11,100 | 49.5 | 12,400 | 55 | 6500 |
| SL18 2207 | 1.378 | 35 | 2.835 | 72 | 0.906 | 23 | 0.97 | 0.44 | 17,100 | 76 | 17,300 | 77 | 6000 |
| SL19 2307 | 1.378 | 35 | 3.150 | 80 | 1.221 | 31 | 1.632 | 0.74 | 25,500 | 113 | 25,000 | 112 | 5500 |
| SL18 3008 | 1.575 | 40 | 2.677 | 68 | 0.827 | 21 | 0.684 | 0.31 | 13,300 | 59 | 15,300 | 68 | 6000 |
| SL18 2208 | 1.575 | 40 | 3.150 | 80 | 0.906 | 23 | 1.213 | 0.55 | 18,900 | 84 | 20,000 | 89 | 5500 |
| SL19 2308 | 1.575 | 40 | 3.543 | 90 | 1.299 | 33 | 2.227 | 1.01 | 34,000 | 152 | 35,000 | 155 | 5000 |
| SL18 3009 | 1.772 | 45 | 2.953 | 75 | 0.906 | 23 | 0.882 | 0.4 | 14,200 | 63 | 17,100 | 76 | 5500 |
| SL18 2209 | 1.772 | 45 | 3.347 | 85 | 0.906 | 23 | 1.301 | 0.59 | 19,800 | 88 | 21,600 | 96 | 5000 |
| SL19 2309 | 1.772 | 45 | 3.937 | 100 | 1.417 | 36 | 3.021 | 1.37 | 36,500 | 162 | 37,000 | 165 | 4500 |
| SL18 3010 | 1.969 | 50 | 3.150 | 80 | 0.906 | 23 | 0.948 | 0.43 | 17,300 | 77 | 20,700 | 92 | 5000 |
| SL18 2210 | 1.969 | 50 | 3.543 | 90 | 0.906 | 23 | 1.411 | 0.64 | 21,400 | 95 | 24,500 | 109 | 4600 |
| SL19 2310 | 1.969 | 50 | 4.331 | 110 | 1.575 | 40 | 3.991 | 1.81 | 46,000 | 205 | 48,500 | 215 | 4100 |
| SL18 3011 | 2.165 | 55 | 3.543 | 90 | 1.024 | 26 | 1.411 | 0.64 | 23,600 | 105 | 30,000 | 134 | 4500 |
| SL18 2211 | 2.165 | 55 | 3.937 | 100 | 0.984 | 25 | 1.918 | 0.87 | 27,500 | 122 | 32,500 | 145 | 4200 |
| SL19 2311 | 2.165 | 55 | 4.724 | 120 | 1.693 | 43 | 5.027 | 2.28 | 54,000 | 242 | 57,000 | 255 | 3700 |
| SL18 2912 | 2.362 | 60 | 3.347 | 85 | 0.630 | 16 | 0.639 | 0.29 | 12,100 | 54 | 16,600 | 74 | 4500 |
| SL18 3012 | 2.362 | 60 | 3.740 | 95 | 1.024 | 26 | 1.521 | 0.69 | 24,300 | 108 | 31,500 | 141 | 4200 |
| SL18 2212 | 2.362 | 60 | 4.331 | 110 | 1.102 | 28 | 2.602 | 1.18 | 34,000 | 152 | 40,000 | 179 | 3800 |
| SL19 2312 | 2.362 | 60 | 5.118 | 130 | 1.811 | 46 | 6.35 | 2.88 | 58,000 | 260 | 63,000 | 280 | 3400 |
| SL18 2913 | 2.559 | 65 | 3.543 | 90 | 0.630 | 16 | 0.684 | 0.31 | 12,800 | 57 | 18,200 | 81 | 4200 |
| SL18 3013 | 2.559 | 65 | 3.937 | 100 | 1.024 | 26 | 1.61 | 0.73 | 25,500 | 113 | 34,500 | 154 | 3900 |
| SL18 2213 | 2.559 | 65 | 4.724 | 120 | 1.221 | 31 | 3.462 | 1.57 | 40,000 | 177 | 48,000 | 213 | 3500 |
| SL19 2313 | 2.559 | 65 | 5.512 | 140 | 1.890 | 48 | 7.762 | 3.52 | 71,000 | 315 | 80,000 | 355 | 3200 |
| SL18 2914 | 2.756 | 70 | 3.937 | 100 | 0.748 | 19 | 1.08 | 0.49 | 17,100 | 76 | 24,300 | 108 | 3800 |
| SL18 3014 | 2.756 | 70 | 4.331 | 110 | 1.181 | 30 | 2.249 | 1.02 | 30,000 | 134 | 38,500 | 171 | 3600 |
| SL18 2214 | 2.756 | 70 | 4.921 | 125 | 1.221 | 31 | 3.66 | 1.66 | 41,000 | 183 | 51,000 | 226 | 3300 |
| SL19 2314 | 2.756 | 70 | 5.906 | 150 | 2.008 | 51 | 9.548 | 4.33 | 78,000 | 345 | 88,000 | 390 | 2900 |
| SL18 2915 | 2.953 | 75 | 4.134 | 105 | 0.748 | 19 | 1.147 | 0.52 | 17,500 | 78 | 26,000 | 116 | 3600 |
| SL18 3015 | 2.953 | 75 | 4.528 | 115 | 1.181 | 30 | 2.337 | 1.06 | 31,500 | 141 | 42,500 | 188 | 3400 |
| SL18 2215 | 2.953 | 75 | 5.118 | 130 | 1.221 | 31 | 3.859 | 1.75 | 42,500 | 190 | 54,000 | 239 | 3200 |
| SL19 2315 | 2.953 | 75 | 6.299 | 160 | 2.165 | 55 | 11.7 | 5.3 | 92,000 | 410 | 107,000 | 475 | 2800 |
| SL18 2916 | 3.150 | 80 | 4.331 | 110 | 0.748 | 19 | 1.213 | 0.55 | 18,200 | 81 | 27,500 | 123 | 3400 |
| SL18 3016 | 3.150 | 80 | 4.921 | 125 | 1.339 | 34 | 3.153 | 1.43 | 39,000 | 173 | 50,000 | 224 | 3200 |
| SL18 2216 | 3.150 | 80 | 5.512 | 140 | 1.299 | 33 | 4.741 | 2.15 | 50,000 | 223 | 63,000 | 280 | 2900 |
| SL19 2316 | 3.150 | 80 | 6.693 | 170 | 2.284 | 58 | 13.9 | 6.32 | 108,000 | 480 | 126,000 | 560 | 2600 |
| SL18 2917 | 3.347 | 85 | 4.724 | 120 | 0.866 | 22 | 1.786 | 0.81 | 22,900 | 102 | 35,000 | 155 | 3200 |
| SL18 3017 | 3.347 | 85 | 5.118 | 130 | 1.339 | 34 | 3.33 | 1.51 | 40,000 | 178 | 53,000 | 235 | 3000 |

# Cylindrical Roller Bearings

## SL18 18, SL18 22, SL18 29, SL18 30 & SL19 SERIES

- Metric series
- Single row
- Semi-locating
- SL18 – Double Flanged Inner Rings
- SL19 – Double Flanged Outer Rings



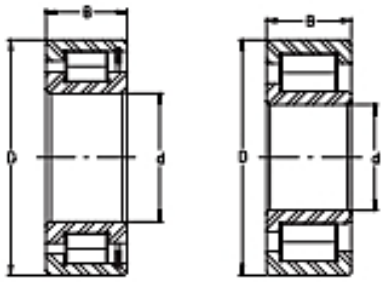

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)623-6572.

| PART NUMBER | SHAFT d inch | SHAFT d mm | OUTER RING OD D inch | OUTER RING OD D mm | BEARING WIDTH B inch | BEARING WIDTH B mm | WEIGHT PER PIECE lbs | WEIGHT PER PIECE kg | DYN. CAP. C lbf | DYN. CAP C kN | STAT. CAP. $C_0$ lbf | STAT. CAP. $C_0$ kN | SPEED LIMIT OIL rpm |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SL18 2217 | 3.347 | 85 | 5.906 | 150 | 1.417 | 36 | 6.042 | 2.74 | 57,000 | 255 | 72,000 | 320 | 2800 |
| SL19 2317 | 3.347 | 85 | 7.087 | 180 | 2.362 | 60 | 16.2 | 7.34 | 115,000 | 510 | 139,000 | 620 | 2400 |
| SL18 2918 | 3.543 | 90 | 4.921 | 125 | 0.866 | 22 | 1.852 | 0.84 | 23,800 | 106 | 37,000 | 165 | 3000 |
| SL18 3018 | 3.543 | 90 | 5.512 | 140 | 1.457 | 37 | 4.344 | 1.97 | 46,500 | 207 | 63,000 | 280 | 2800 |
| SL18 2218 | 3.543 | 90 | 6.299 | 160 | 1.575 | 40 | 7.673 | 3.48 | 64,000 | 285 | 82,000 | 365 | 2600 |
| SL19 2318 | 3.543 | 90 | 7.480 | 190 | 2.520 | 64 | 19.5 | 8.83 | 126,000 | 560 | 148,000 | 660 | 2300 |
| SL18 2919 | 3.740 | 95 | 5.118 | 130 | 0.866 | 22 | 1.896 | 0.86 | 25,500 | 114 | 38,500 | 172 | 2900 |
| SL18 2219 | 3.740 | 95 | 6.693 | 170 | 1.693 | 43 | 9.195 | 4.17 | 75,000 | 335 | 97,000 | 430 | 2400 |
| SL19 2319 | 3.740 | 95 | 7.874 | 200 | 2.638 | 67 | 22.5 | 10.2 | 130,000 | 580 | 162,000 | 720 | 2200 |
| SL18 2920 | 3.937 | 100 | 5.512 | 140 | 0.945 | 24 | 2.514 | 1.14 | 29,500 | 132 | 44,500 | 199 | 2700 |
| SL18 3020 | 3.937 | 100 | 5.906 | 150 | 1.457 | 37 | 4.741 | 2.15 | 49,000 | 218 | 69,000 | 305 | 2600 |
| SL18 2220 | 3.937 | 100 | 7.087 | 180 | 1.811 | 46 | 11.3 | 5.13 | 88,000 | 390 | 117,000 | 520 | 2300 |
| SL19 2320 | 3.937 | 100 | 8.465 | 215 | 2.874 | 73 | 28.7 | 13 | 160,000 | 710 | 193,000 | 860 | 2100 |
| SL18 2922 | 4.331 | 110 | 5.906 | 150 | 0.945 | 24 | 2.712 | 1.23 | 31,000 | 137 | 48,000 | 213 | 2500 |
| SL18 3022 | 4.331 | 110 | 6.693 | 170 | 1.772 | 45 | 7.718 | 3.5 | 64,000 | 285 | 89,000 | 395 | 2300 |
| SL18 2222 | 4.331 | 110 | 7.874 | 200 | 2.087 | 53 | 16.0 | 7.24 | 102,000 | 455 | 133,000 | 590 | 2100 |
| SL19 2322 | 4.331 | 110 | 9.449 | 240 | 3.150 | 80 | 37.5 | 17 | 189,000 | 840 | 218,000 | 970 | 1900 |
| SL18 2924 | 4.724 | 120 | 6.496 | 165 | 1.063 | 27 | 3.815 | 1.73 | 39,500 | 176 | 64,000 | 285 | 2300 |
| SL18 3024 | 4.724 | 120 | 7.087 | 180 | 1.811 | 46 | 8.379 | 3.8 | 67,000 | 300 | 98,000 | 435 | 2200 |
| SL18 2224 | 4.724 | 120 | 8.465 | 215 | 2.284 | 58 | 20.0 | 9.08 | 119,000 | 530 | 164,000 | 730 | 1900 |
| SL19 2324 | 4.724 | 120 | 10.236 | 260 | 3.386 | 86 | 49.2 | 22.3 | 223,000 | 990 | 275,000 | 1220 | 1700 |
| SL18 2926 | 5.118 | 130 | 7.087 | 180 | 1.181 | 30 | 5.138 | 2.33 | 47,000 | 210 | 79,000 | 350 | 2100 |
| SL18 3026 | 5.118 | 130 | 7.874 | 200 | 2.047 | 52 | 12.5 | 5.65 | 97,000 | 430 | 137,000 | 610 | 2000 |
| SL18 2226 | 5.118 | 130 | 9.055 | 230 | 2.520 | 64 | 24.8 | 11.25 | 142,000 | 630 | 193,000 | 860 | 1800 |
| SL18 2928 | 5.512 | 140 | 7.480 | 190 | 1.181 | 30 | 5.336 | 2.42 | 51,000 | 228 | 84,000 | 375 | 2000 |
| SL18 3028 | 5.512 | 140 | 8.268 | 210 | 2.087 | 53 | 13.3 | 6.04 | 102,000 | 455 | 151,000 | 670 | 1900 |
| SL18 2228 | 5.512 | 140 | 9.843 | 250 | 2.677 | 68 | 31.9 | 14.47 | 162,000 | 720 | 229,000 | 1020 | 1700 |
| SL18 2930 | 5.906 | 150 | 8.268 | 210 | 1.417 | 36 | 8.313 | 3.77 | 69,000 | 305 | 110,000 | 490 | 1800 |
| SL18 3030 | 5.906 | 150 | 8.858 | 225 | 2.205 | 56 | 16.2 | 7.33 | 107,000 | 475 | 157,000 | 700 | 1700 |
| SL18 2230 | 5.906 | 150 | 10.630 | 270 | 2.874 | 73 | 40.6 | 18.43 | 187,000 | 830 | 265,000 | 1180 | 1500 |
| SL18 2932 | 6.299 | 160 | 8.661 | 220 | 1.417 | 36 | 8.82 | 4 | 72,000 | 320 | 117,000 | 520 | 1700 |
| SL18 3032 | 6.299 | 160 | 9.449 | 240 | 2.362 | 60 | 19.4 | 8.8 | 121,000 | 540 | 182,000 | 810 | 1600 |
| SL18 2232 | 6.299 | 160 | 11.417 | 290 | 3.150 | 80 | 50.7 | 23 | 229,000 | 1020 | 330,000 | 1460 | 1400 |
| SL18 2934 | 6.693 | 170 | 9.055 | 230 | 1.417 | 36 | 9.482 | 4.3 | 74,000 | 330 | 126,000 | 560 | 1600 |
| SL18 3034 | 6.693 | 170 | 10.236 | 260 | 2.638 | 67 | 26.9 | 12.2 | 160,000 | 710 | 241,000 | 1070 | 1500 |
| SL18 2234 | 6.693 | 170 | 12.205 | 310 | 3.386 | 86 | 63.2 | 28.65 | 255,000 | 1140 | 375,000 | 1660 | 1400 |
| SL18 2936 | 7.087 | 180 | 9.843 | 250 | 1.654 | 42 | 13.7 | 6.2 | 92,000 | 410 | 155,000 | 690 | 1500 |
| SL18 3036 | 7.087 | 180 | 11.024 | 280 | 2.913 | 74 | 35.5 | 16.1 | 184,000 | 820 | 285,000 | 1260 | 1400 |
| SL18 2236 | 7.087 | 180 | 12.598 | 320 | 3.386 | 86 | 65.7 | 29.8 | 265,000 | 1180 | 395,000 | 1760 | 1300 |
| SL18 2938 | 7.480 | 190 | 10.236 | 260 | 1.654 | 42 | 14.3 | 6.5 | 102,000 | 455 | 178,000 | 790 | 1400 |
| SL18 3038 | 7.480 | 190 | 11.417 | 290 | 2.953 | 75 | 37.5 | 17 | 189,000 | 840 | 295,000 | 1320 | 1400 |
| SL18 2238 | 7.480 | 190 | 13.386 | 340 | 3.622 | 92 | 78.6 | 35.65 | 290,000 | 1300 | 425,000 | 1900 | 1200 |
| SL18 1840 | 7.874 | 200 | 9.843 | 250 | 0.945 | 24 | 5.667 | 2.57 | 40,000 | 178 | 72,000 | 320 | 1400 |
| SL18 2940 | 7.874 | 200 | 11.024 | 280 | 1.890 | 48 | 20.1 | 9.1 | 124,000 | 550 | 211,000 | 940 | 1400 |
| SL18 3040 | 7.874 | 200 | 12.205 | 310 | 3.228 | 82 | 48.1 | 21.8 | 216,000 | 960 | 345,000 | 1530 | 1300 |

# Cylindrical Roller Bearings

## SL18 18, SL18 22, SL18 29, SL18 30 & SL19 SERIES

- Metric series
- Single row
- Semi-locating
- SL18 – Double Flanged Inner Rings
- SL19 – Double Flanged Outer Rings




For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)623-6572.

| PART NUMBER | SHAFT d inch | SHAFT d mm | OUTER RING OD D inch | OUTER RING OD D mm | BEARING WIDTH B inch | BEARING WIDTH B mm | WEIGHT PER PIECE lbs | WEIGHT PER PIECE kg | DYN. CAP. C lbf | DYN. CAP C kN | STAT. CAP. $C_0$ lbf | STAT. CAP. $C_0$ kN | SPEED LIMIT OIL rpm |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SL18 2240 | 7.874 | 200 | 14.173 | 360 | 3.858 | 98 | 95.1 | 43.12 | 320,000 | 1420 | 460,000 | 2040 | 1200 |
| SL18 1844 | 8.661 | 220 | 10.63 | 270 | 0.945 | 24 | 6.174 | 2.8 | 42000 | 187 | 79000 | 350 | 1300 |
| SL18 2944 | 8.661 | 220 | 11.811 | 300 | 1.890 | 48 | 21.8 | 9.9 | 128,000 | 570 | 234,000 | 1040 | 1200 |
| SL18 3044 | 8.661 | 220 | 13.386 | 340 | 3.543 | 90 | 62.6 | 28.4 | 260,000 | 1150 | 405,000 | 1810 | 1200 |
| SL18 1848 | 9.449 | 240 | 11.811 | 300 | 1.102 | 28 | 9.702 | 4.4 | 47500 | 212 | 91000 | 405 | 1200 |
| SL18 2948 | 9.449 | 240 | 12.598 | 320 | 1.890 | 48 | 23.4 | 10.6 | 135,000 | 600 | 255,000 | 1130 | 1200 |
| SL18 3048 | 9.449 | 240 | 14.173 | 360 | 3.622 | 92 | 68.1 | 30.9 | 270,000 | 1210 | 445,000 | 1990 | 1100 |
| SL18 1852 | 10.236 | 260 | 12.598 | 320 | 1.102 | 28 | 10.4 | 4.71 | 50000 | 222 | 99000 | 440 | 1100 |
| SL18 2952 | 10.236 | 260 | 14.173 | 360 | 2.362 | 60 | 40.8 | 18.5 | 178,000 | 790 | 330,000 | 1460 | 1000 |
| SL18 3052 | 10.236 | 260 | 15.748 | 400 | 4.095 | 104 | 98.1 | 44.5 | 365,000 | 1620 | 570,000 | 2550 | 1000 |
| SL18 1856 | 11.024 | 280 | 13.78 | 350 | 1.299 | 33 | 15.4 | 7 | 69000 | 305 | 135000 | 600 | 1000 |
| SL18 2956 | 11.024 | 280 | 14.961 | 380 | 2.362 | 60 | 43.4 | 19.7 | 207,000 | 920 | 390,000 | 1740 | 1000 |
| SL18 3056 | 11.024 | 280 | 16.535 | 420 | 4.173 | 106 | 105.8 | 48 | 375,000 | 1660 | 610,000 | 2700 | 950 |
| SL18 1860 | 11.811 | 300 | 14.961 | 380 | 1.496 | 38 | 22.1 | 10 | 84000 | 375 | 164000 | 730 | 950 |
| SL18 2960 | 11.811 | 300 | 16.535 | 420 | 2.835 | 72 | 68.8 | 31.2 | 265,000 | 1180 | 500,000 | 2230 | 900 |
| SL18 3060 | 11.811 | 300 | 18.110 | 460 | 4.646 | 118 | 146.9 | 66.6 | 460,000 | 2040 | 750,000 | 3350 | 850 |
| SL18 1864 | 12.598 | 320 | 15.748 | 400 | 1.496 | 38 | 23.4 | 10.6 | 87000 | 385 | 175000 | 780 | 900 |
| SL18 2964 | 12.598 | 320 | 17.323 | 440 | 2.835 | 72 | 72.5 | 32.9 | 275,000 | 1220 | 530,000 | 2360 | 850 |
| SL18 3064 | 12.598 | 320 | 18.898 | 480 | 4.764 | 121 | 158.1 | 71.7 | 470,000 | 2090 | 790,000 | 3500 | 800 |
| SL18 1868 | 13.386 | 340 | 16.535 | 420 | 1.496 | 38 | 24.7 | 11.2 | 89000 | 395 | 184000 | 820 | 850 |
| SL18 2968 | 13.386 | 340 | 18.110 | 460 | 2.835 | 72 | 76.5 | 34.7 | 285,000 | 1260 | 560,000 | 2500 | 800 |
| SL18 3068 | 13.386 | 340 | 20.472 | 520 | 5.236 | 133 | 211.2 | 95.8 | 560,000 | 2490 | 930,000 | 4150 | 750 |
| SL18 1872 | 14.173 | 360 | 17.323 | 440 | 1.496 | 38 | 25.8 | 11.7 | 92000 | 410 | 196000 | 870 | 800 |
| SL18 2972 | 14.173 | 360 | 18.898 | 480 | 2.835 | 72 | 80.3 | 36.4 | 290,000 | 1290 | 600,000 | 2650 | 750 |
| SL18 3072 | 14.173 | 360 | 21.260 | 540 | 5.276 | 134 | 222.7 | 101 | 570,000 | 2550 | 980,000 | 4350 | 700 |
| SL18 1876 | 14.961 | 380 | 18.898 | 480 | 1.811 | 46 | 42.3 | 19.2 | 128000 | 570 | 260000 | 1150 | 750 |
| SL18 2976 | 14.961 | 380 | 20.472 | 520 | 3.228 | 82 | 114.9 | 52.1 | 375,000 | 1670 | 740,000 | 3300 | 700 |
| SL18 3076 | 14.961 | 380 | 22.047 | 560 | 5.315 | 135 | 233.7 | 106 | 600,000 | 2650 | 1,020,000 | 4550 | 700 |
| SL18 1880 | 15.748 | 400 | 19.685 | 500 | 1.811 | 46 | 44.1 | 20 | 133000 | 590 | 275000 | 1220 | 700 |
| SL18 2980 | 15.748 | 400 | 21.260 | 540 | 3.228 | 82 | 119.7 | 54.3 | 385,000 | 1720 | 790,000 | 3500 | 700 |
| SL18 3080 | 15.748 | 400 | 23.622 | 600 | 5.827 | 148 | 308.7 | 140 | 700,000 | 3100 | 1,240,000 | 5500 | 650 |
| SL18 1884 | 16.535 | 420 | 20.472 | 520 | 1.811 | 46 | 46.1 | 20.9 | 135000 | 600 | 285000 | 1260 | 700 |
| SL18 2984 | 16.535 | 420 | 22.047 | 560 | 3.228 | 82 | 125.5 | 56.9 | 395,000 | 1750 | 810,000 | 3600 | 650 |
| SL18 1888 | 17.323 | 440 | 21.26 | 540 | 1.811 | 46 | 48.1 | 21.8 | 137000 | 610 | 295000 | 1320 | 650 |
| SL18 2988 | 17.323 | 440 | 23.622 | 600 | 3.740 | 95 | 172.2 | 78.1 | 480,000 | 2130 | 940,000 | 4200 | 600 |
| SL18 1892 | 18.110 | 460 | 22.835 | 580 | 2.205 | 56 | 74.8 | 33.9 | 178000 | 790 | 375000 | 1660 | 600 |
| SL18 2992 | 18.110 | 460 | 24.409 | 620 | 3.740 | 95 | 178.8 | 81.1 | 485,000 | 2160 | 980,000 | 4350 | 600 |
| SL18 1896 | 18.898 | 480 | 23.622 | 600 | 2.205 | 56 | 77.6 | 35.2 | 180000 | 800 | 385000 | 1720 | 600 |
| SL18 2996 | 18.898 | 480 | 25.591 | 650 | 3.937 | 100 | 208.8 | 94.7 | 550,000 | 2430 | 1,100,000 | 4900 | 550 |
| SL18 18/500 | 19.685 | 500 | 24.409 | 620 | 2.205 | 56 | 80.5 | 36.5 | 184000 | 820 | 405000 | 1810 | 600 |
| SL18 29/500 | 19.685 | 500 | 26.378 | 670 | 3.937 | 100 | 216.8 | 98.3 | 550,000 | 2460 | 1,150,000 | 5100 | 550 |